


APPLICATION

Temperature resistant detonating cord for oilfield use.

SPECIFICATIONS

	Metric	Imperial
Explosive Core	RDX 16 - 18 g/m	75 - 84 grains/ft
Tensile Strength	800 N	175 pounds
Detonation Velocity	7,700 ± 200 m/s	25,263 ± 656 ft/s
Outside Diameter	5.2 ± 0.2 mm	0.205 ± 0.008 inches
Lap Joint Sensitivity	Yes	
Cord X-Rayed	Yes	
Maximum Shrinkage	2%	
Cord Colour	Light Blue	

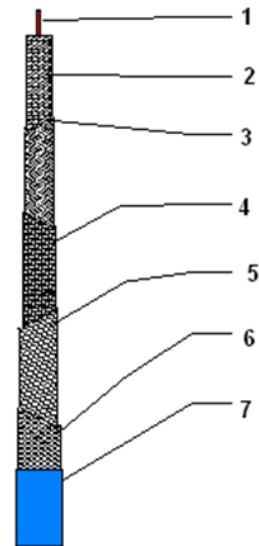

All Dimensions in mm

SHELF LIFE

5 years at storage condition: - 40°C to + 60° C; -40°F to + 140°F; maximum 65% relative humidity; good ventilation.

DISPOSAL

Detonating cords should be destroyed only by authorised persons and in accordance with all applicable laws, regulations and company procedures.

1. Identification Thread
2. Explosive
3. Plastic Foil Strip
4. First Covering with Thread
5. Second Covering with Thread
6. Third Covering with Thread
7. Heat-Resistant Sheath

Part Number	Classification	CE Number	UN Number	D.O.T.
2315424	1.4D	0080.EXP.97.0023	0289	EX2018012093

TEMPERATURE RESISTANCE

Time	Temperature in °C	Temperature in °F
201 hours	80°C	176°F
24 hours	110°C	230°F
1 hour	150°C	302°F

NOTE: Handling not recommended for use below - 20 °C / -13 ° F

PACKING INFORMATION

Quantity per box	152.5 m (500ft) 5 pcs of 30.5 m
Gross weight per box	14.0 kg
Net weight per box	4.8 kg
NEC per box	2.7 kg
Dimensions of box	71.5 cm x 71.5 cm x 12.5 cm
Product Weight/m	31.6 g
Package Type	Carton + Vacuum Bag
+/- 5% tolerance in weights	