

Application

Temperature resistant detonator for oilfield use.

Electrical Parameters

Resistance: $50 \pm 2 \Omega$
 No fire current: 0.2 A
 All fire current: 0.8 A

Electrostatic Sensitivity

7 KV / 2000 PF
 25 KV / 500 PF / 5 K Ω
 (Valid for pin-to-pin, pin-to-case, shorted-pins-to-case)

Explosives


Primary charge: 80mg PbN₆ 1.23 grains
 Base charge: 575mg HNS 10.42 grains

Shelf Life

5 years at storage conditions of -40°C to +60°C; -40°F to +140°F;
 maximum 65% relative humidity with good ventilation.

Disposal

Detonators should be destroyed only by authorised persons and in accordance with all applicable laws, regulations and company procedures.

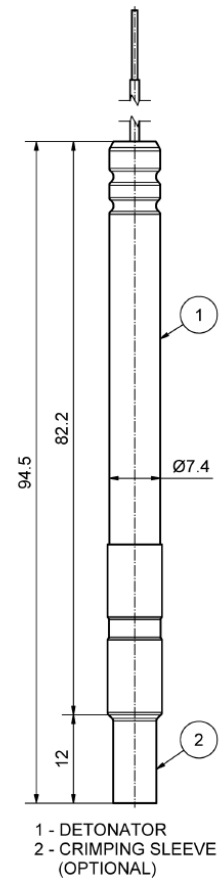

Part Number	Classification	CE Number	UN Number	D.O.T.
2330193	1.4S	0080.EXP.98.0026	0456	

Temperature Resistance

Time	Temperature in °C	Temperature in °F
1 hour	260°C	500°F

Packing Information

Quantity per box	50 pcs
Gross weight per box	13,6 kg
Net weight per box	0.59 kg
NEC per box	0.04 kg
Dimensions of box	33cm x 32cm x 23cm
Product Weight	11.8 g
Package Type	Steel Case + Vacuum Bag

+/- 5 % tolerance in weights