

APPLICATION

Designed to add weight to string with electric connection.

SPECIFICATIONS


Top Connector Thread	1 3/16" - 12 THD. Type "A" Box
Bottom Connector Thread	1 3/16" - 12 THD. Type "C" Pin
Temperature rating dependening on O-ring type	

AVAILABLE SIZES

See sizes below

RECOMMENDATIONS

Check insulation and continuity before each run. Check O-Ring integrity before each run.

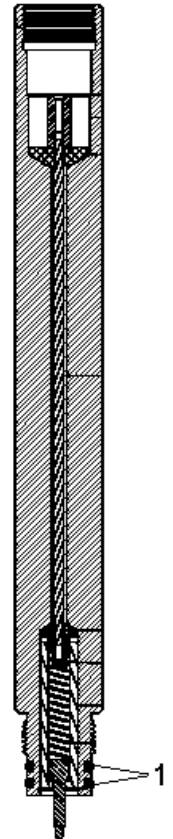

SELECTION CHART

Item	O.D.	Length	Part No.
Sinker Bar Assembly, Lead Filled	1 3/8"	7 ft.	2324292
	1 11/16"	5 ft.	2324190
		7 ft.	2324191
	2"	5 ft.	2324210
		7 ft.	2324211
Sinker Bar Assembly, Tungsten Filled	1 11/16"	5 ft.	2326918
		7 ft.	2324189
	2"	5 ft.	2324208
		7 ft.	2324209
	Sinker Bar Assembly, All Steel	1 3/8"	5 ft.
1 11/16"		2324187	
Contact Replacement Kit, less rod	All Sizes	All Length	2324194
Contact Rod		5 ft.	2324192
		7 ft.	2324193
#1: O-Ring 260oC / 500oF		All Length	2313371